


www.eurocoin.co.uk



SECURITY

EFFICIENCY

QUALITY

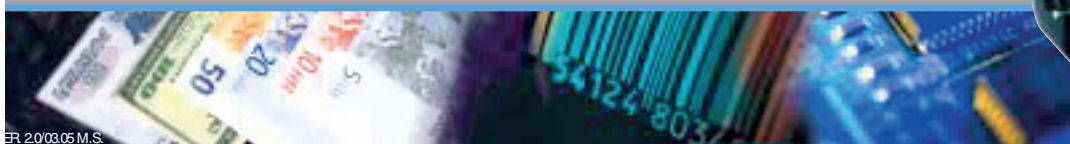

UBA SERIES



JAPAN CASH MACHINE

sales@eurocoin.co.uk


+44 (0) 208 275 3000

www.eurocoin.co.uk

UBA

UNIVERSAL BILL ACCEPTOR

SPECIFICATIONS:

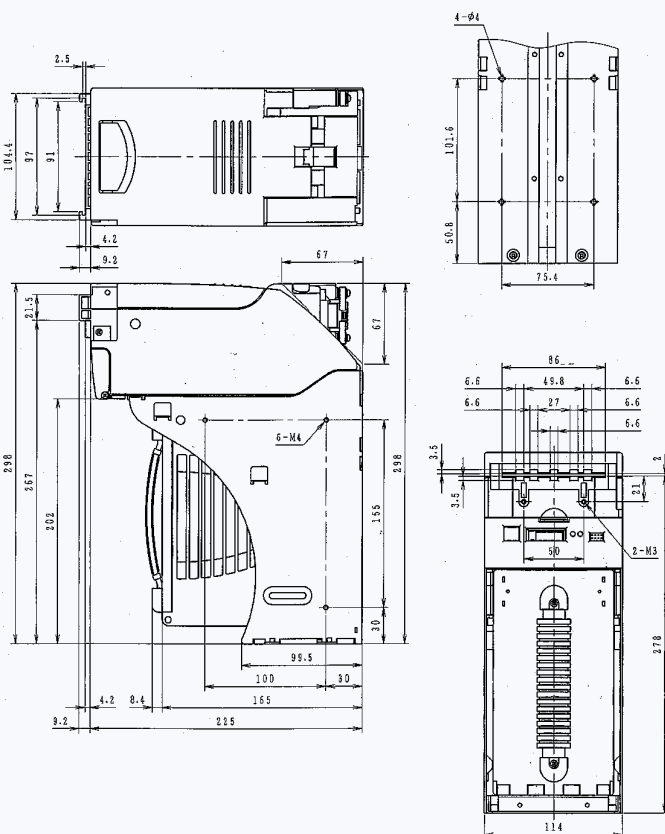

All references in mm

JAPAN CASH MACHINE

HEAD OFFICE, JAPAN:

2-3-15 Nishiwaki, Hirano-ku, Osaka 547-0035
Tel.: +81 06 6703 8400 Fax: +81 06 6707 0348
Internet: www.jcm-hq.co.jp

EUROPE:

Mündelheimer Weg 60, 40472 Düsseldorf, Germany
Tel.: +49 211 530 6450 Fax: +49 211 5306 4565
Internet: www.jcm-europe.com

UNITED KINGDOM:

Unit B, Third Avenue, Denbigh West Business Park,
Bletchley, Milton Keynes, MK1 1EJ
Tel.: +44 870 770 2863 Fax: +44 190 837 7834
Internet: www.jcm-uk.com

USA:

925 Pilot Road Las Vegas, Nevada 89119
Tel.: +1 702 651 0000 Fax: +1 702 651 0003
Internet: www.jcm-american.com

HONGKONG, CHINA:

Unit 1-7, 3F, Favor Industrial Center, 2-6 Kin Hong St., Kwai
Chung N.T., Hongkong
Tel. +852 2429 7187 Fax: +852 2420 8864
Internet: www.jcmgold.com.hk

JCM reserves the right to change product specifications without notice.

POWER REQUIREMENTS

DC+12V ($\pm 5\%$)
Standby -3.6VA, Operating -20VA (Max. 48VA)

WEIGHT

Approximately 4kg including cashbox

DIMENSIONS

114mm (w) x 234mm (d) x 298mm (h)

CASH BOX

Compatible with WBA-Series Cashbox
Capacity approximately 500 notes (1000 option)
Visual Audit Window

INSERTION

Lengthwise,
Width range is 62-85mm

INFORMATION FOR INSTALLATION

Internal use only, horizontal mounting

VALIDATION SPEED

Validation approximately 2 seconds
Stack completion approximately 4 seconds
Automatic Retry if note rejected

ESCROW

One note

MAINTENANCE

All major areas including the bill path are
accessible without the use of tools

INTERFACE

Serial interface (optocoupler isolation)
RS-232C/MD5 (Option)
USB (Option)

APPROVALS

CE/UL/CSA/TP

ENVIRONMENT

Operating: 5°C-50°C
Storage: -20°C-60°C
Humidity: 30%-85% RH
(no condensation)



VER 20/03.05 M.S.

