


# 22 INCH LCD MONITOR

WIDE FORMAT (16:10)

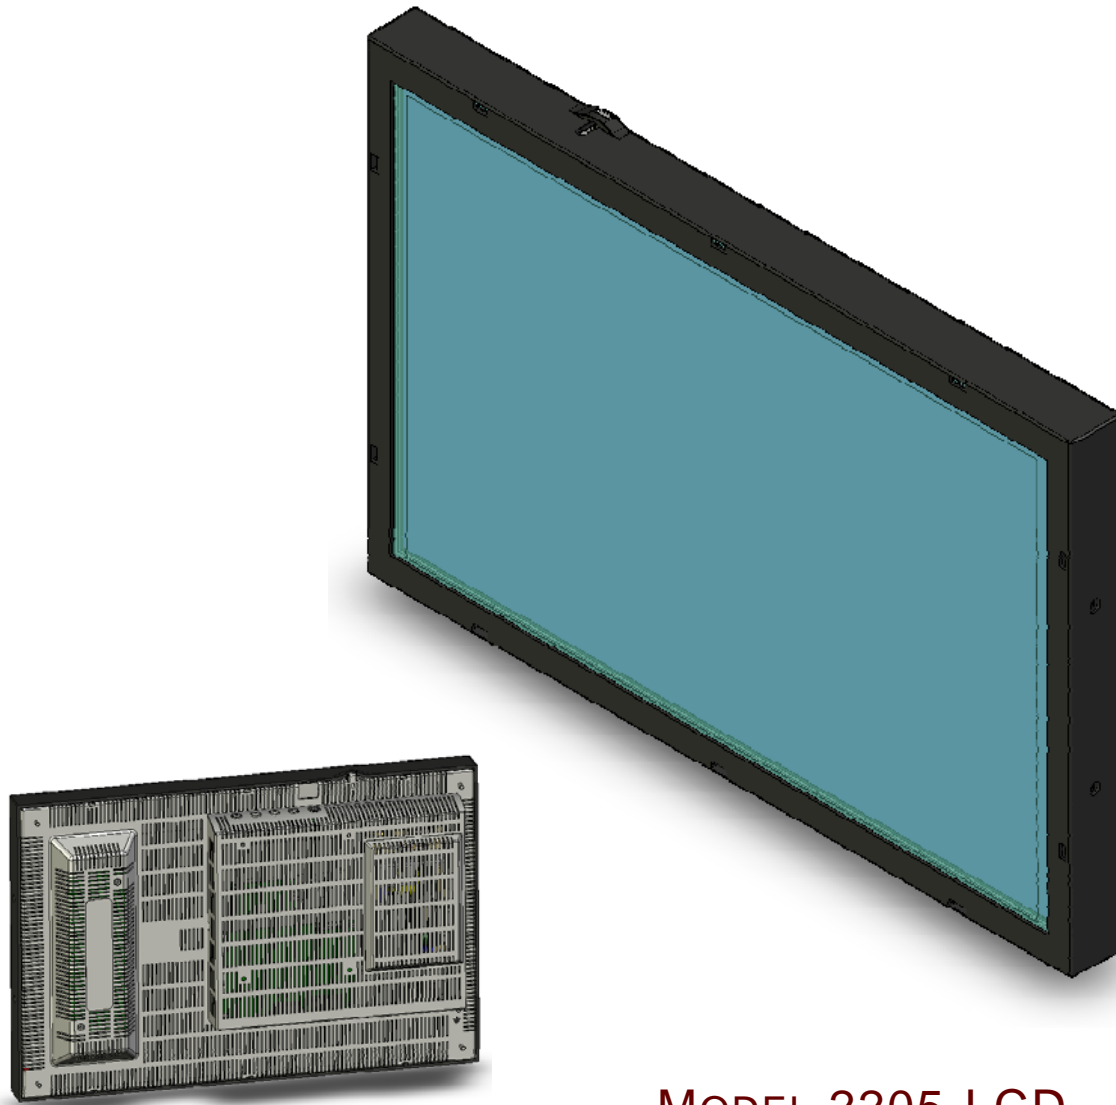

22" LCD Monitor with a bright, high contrast image. Compact steel enclosure allows for flexible mounting possibilities. Can be supplied with Touch Sensor & Controller or Glass panel.

## MODEL 2205-LCD 22 INCH LCD

- 1680 x 1050 Native Resolution
- Viewing Angle (160° in all directions)
- Infra-Red Remote Adjustment of Image Properties
- 175 nits (cd/m<sup>2</sup>)
- 1000:1 Contrast Ratio
- 16.7 Million Colors
- 22" Viewable Image Size
- Analog and Digital Inputs
- 90 to 264VAC Operation
- Operational in 70° C Environments



## CERONIX

13350 NEW AIRPORT ROAD  
AUBURN, CA 95602  
P 530.886.6400  
F 530.888.1065  
WWW.CERONIX.COM

**Specifications**

<b>Panel</b>	a-si TFT Active Matrix, TN (Twisted Nematic) Mode
<b>Viewable Size</b>	22"
<b>Native Resolution</b>	1680 x 1050
<b>Aspect Ratio</b>	16:10
<b>Pixel Size (mm)</b>	0.282(H) x 0.282(W)
<b>Brightness (Typical)</b>	175 cd/m <sup>2</sup>
<b>Contrast Ratio</b>	1000:1
<b>Response Time (Sum of Tr, Tf)</b>	13mS
<b>Colors Supported</b>	16.7 Million
<b>Viewing Angle</b>	160° in Horizontal and Vertical Directions
<b>Interface</b>	Analog & Digital
<b>Input Connectors</b>	RGB 15-Pin D-Sub, DVI-D
<b>Frequency</b>	31.5-80KHz Horizontal, 56-75Hz Vertical
<b>Power Consumption</b>	40 Watts, 90 - 264VAC, 50/60Hz
<b>Dimensions (W x H x D)</b>	19.815" x 13.020" x 2.806"
<b>Environment</b>	Operational 0° to 70°C, Humidity 5% to 90% Non-Condensing

**Agency Certifications**


Intertek :  
Conforms to ANSI/UL STD. 60950-1, Certified to CAN/CSA STD. C22.22 No. 60950-1-03 (Registration Number: 3191746)

TUV:  
Manufactured under a quality management system, certified to ISO 9001 (Certificate Registration Number 950 99 0571)

