





### DIMENSIONS:

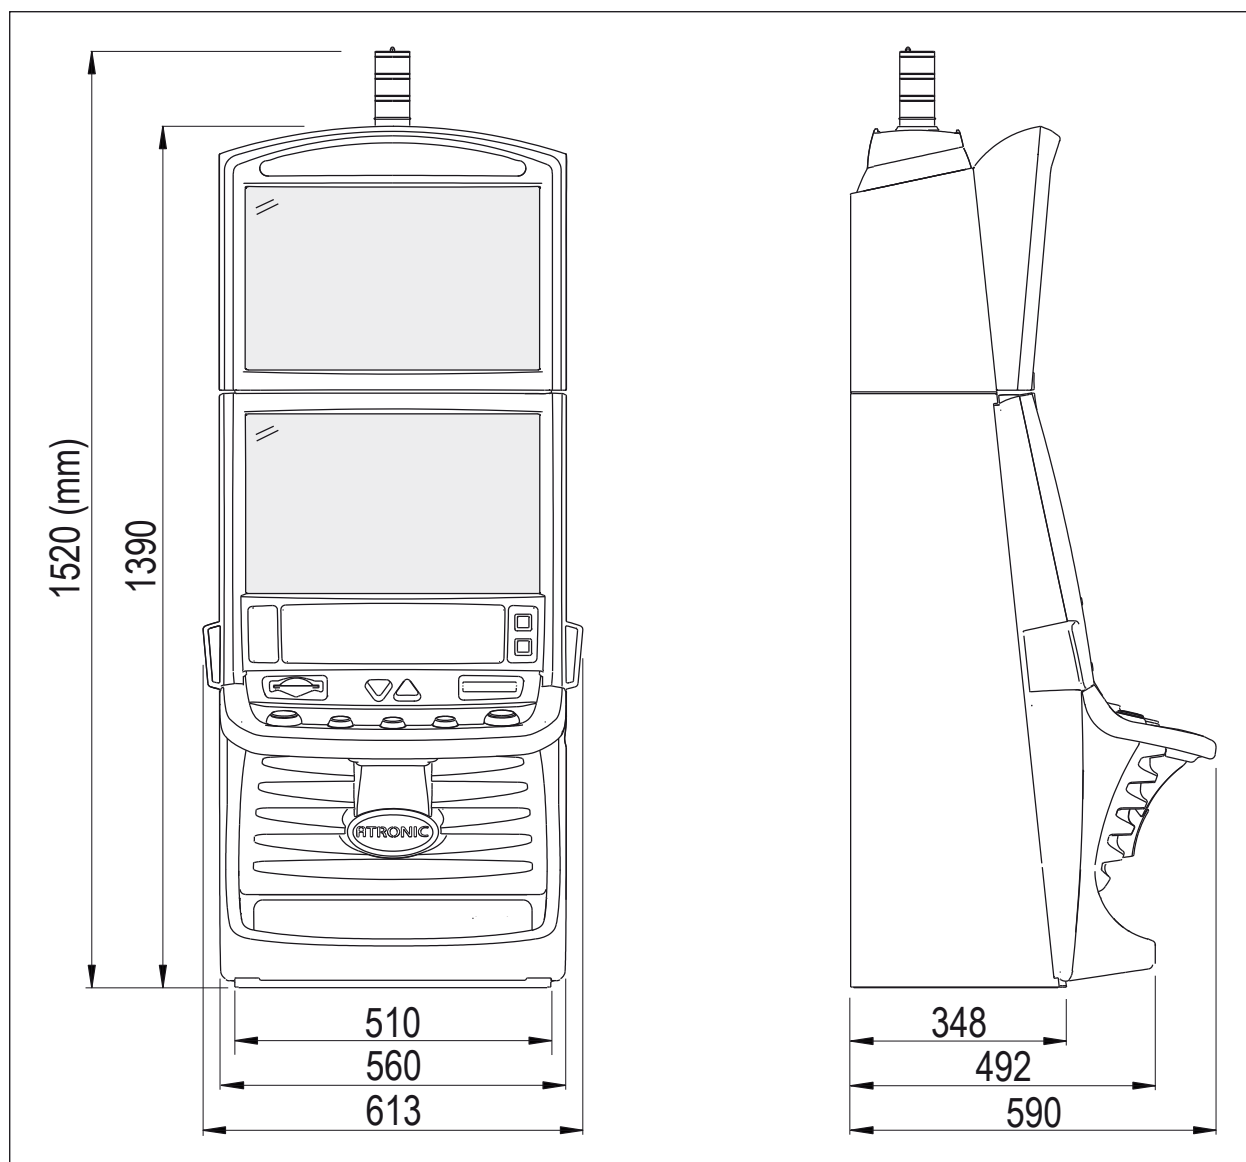

OXYGEN™ Cabinet with Toplight	
Weight	97 kg (coin-less) / 104 kg (coin-on)
Height	1520 mm
Width	613 mm
Depth	590 mm

### DIMENSIONS:

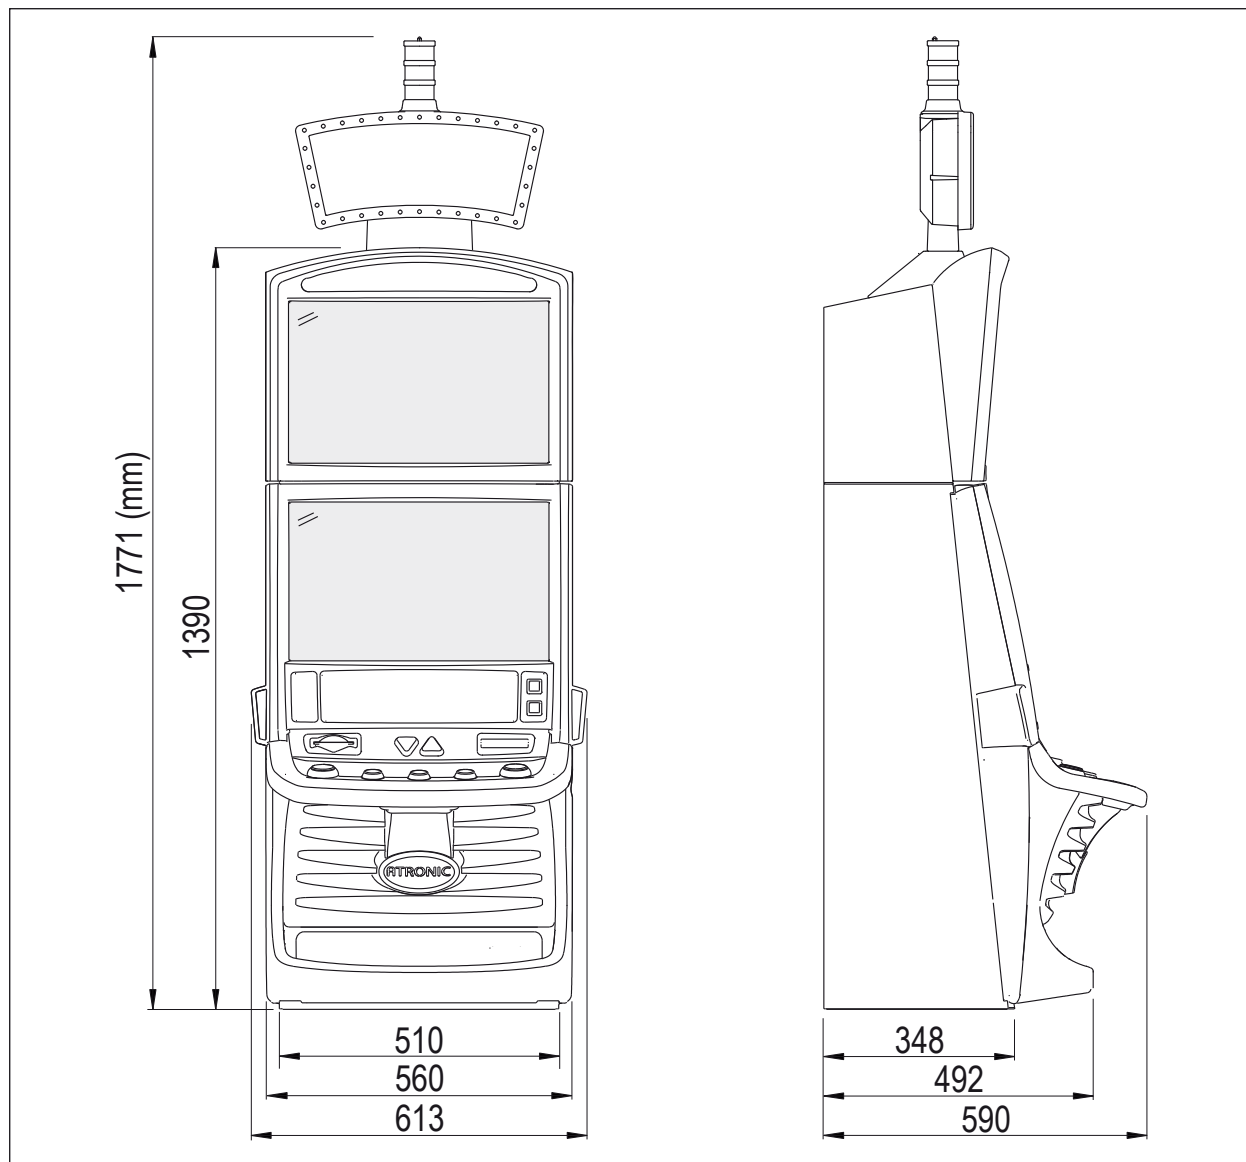

OXYGEN™ Cabinet with Topper	
Weight	99 kg (coin-less) / 106 kg (coin-on)
Height	1771 mm
Width	613 mm
Depth	590 mm



## TECHNICAL DATA:

Technical Specifications	
<b>Model</b>	SEPOXG / OXYGEN
<b>Dimensions in mm</b> (max. w/h/d)	613 / 1520 (with topper: 1771) / 590
<b>Weight</b>	97 kg (coin-less) / 104 kg (coin-on)

Electrical Specification	
<b>Required Voltage</b>	100V to 240V AC, 50Hz / 60Hz Use earthed power outlet rated min. 8A / 115V, 4A / 230V.
<b>Power Consumption</b>	
Idle Mode	1,9A / 115V, 0,8A / 230V
Payout Mode	2,4A / 115V, 1,2A / 230V
Max. Power	450 Watt (without internal power outlets)
<b>Power Supply</b>	
Secondary Voltage	+24V / 5A +12V / 17A - 12V / 0,5A +5V / 20A +3.3V / 7A
<b>Fuses</b> (all glass fuses 5 x 20mm)	
Main Fuse	T5A / 250V
Peripheral Board (secondary voltages)	F100 (+5 V0) = T 5A F102 (+12 VP_1) = T 5A F103 (+12 VP_2) = T 5A F104 (+12 VP_3) = T 5A F105 (+12 VP_4) = T 5A F107 (+24 V) = T 4A

Environmental Specifications	
<b>Operating Temperature</b>	0°C - 45°C / (32°F - 113°F)
<b>Operating Humidity</b>	0% to 85% (non condensing)

### DRILLING TEMPLATE:

