


Wide Body Cabinet (WBC) - Round Top **February 15, 2006**



Wide Body Cabinet (WBC) - Round Top February 15, 2006

DIMENSIONS:

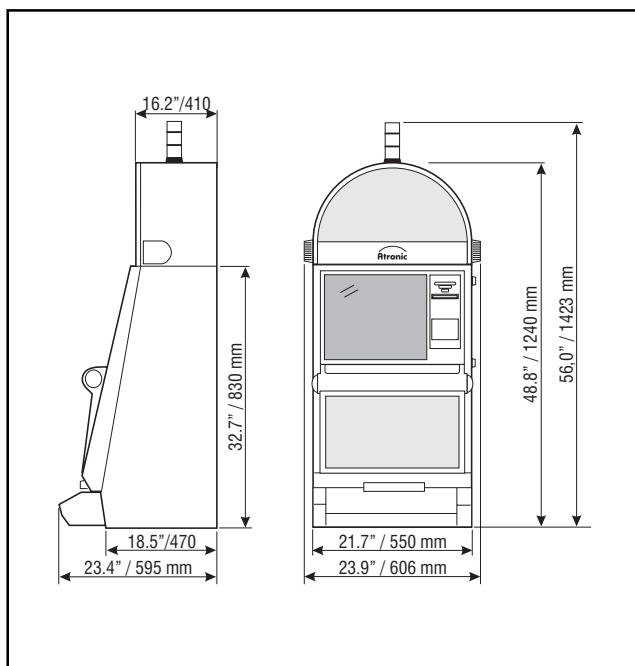


WBC - Round Top with 3 stage Candle

Weight: approx. 220 lbs / 100 Kg

Height: 56.0" / 1423 mm

Width: 23.9" / 606 mm

Depth: 23.4" / 595 mm

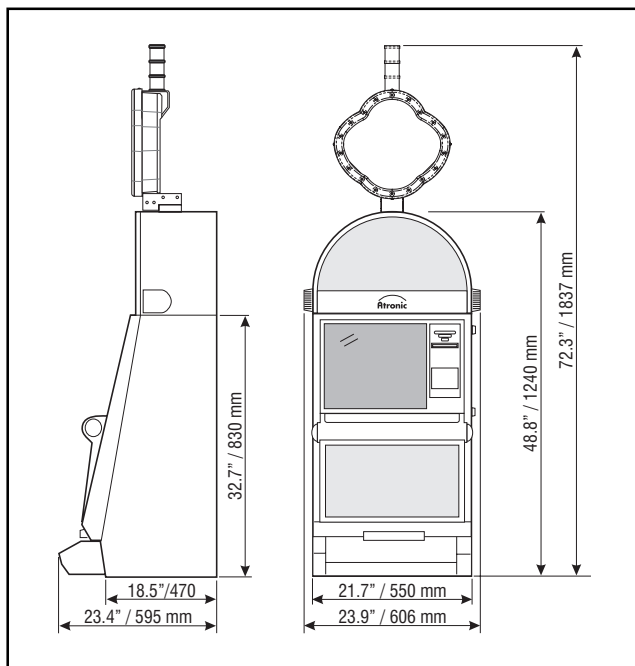

WBC - Round Top with Topper

Weight: approx. 228 lbs / 104 Kg

Height: 72.3" / 1837 mm

Width: 23.9" / 606 mm

Depth: 23.4" / 595 mm

Wide Body Cabinet (WBC) - Round Top

February 15, 2006

TECHNICAL DATA: Electrical Specifications

| | | |
|-------------------|--|--|
| Required Voltage | 220V - 240V, 2.0A, 50Hz 100V - 120V, 4.0A, 60Hz | |
| Power Consumption | Idle Mode: | approx. 185W 1.60A / 115V, 0.8A / 230V |
| | Payout Mode: | approx 200W 1.75 / 115V, 0.9A / 230V |
| Power Supply | Secondary Voltage: | +24V / 4A +12V / 4A -12V / 0.3A +5V / 10A |
| | | |
| Fuses | Power Supply: | F 5A / 250V |
| | Monitor: | T 3A / 250V |
| | Power Board: | T 2A / 250V |
| | Backplane F1: | +5V T 5A / 250V |
| | Backplane F2: | +12V T 5A / 250V |
| | Backplane F3: | -12V T 0.315A / 250V |
| | Backplane F4: | +24V T 3.15A / 250V |
| Lamps | Fluorescent Lamps: | 15W, 17" / 438 mm |
| | Button Lamps, small: | 14V / 1W |
| | Button Lamps, large: | 14V / 2W |

Environmental Specifications

| | |
|------------------------|---------------------------|
| Operating Temperature: | 32°F / 0°C - 113°F / 45°C |
| Operating Humidity: | 0% - 85% |
| Combustible Weight: | < 20 lbs. / 9 Kg |

Wide Body Cabinet (WBC) - Round Top

February 15, 2006

**DRILLING
TEMPLATE:**

