



44	1	R43	E-00105-0245	RES, 30 KOHM 5% .25 WATT CF	U1	8	U2,U22,U33,U42	E-01008-0010	IC, SIGNAL, 10 PIN DIP
45	1	R45	E-00105-0344	RES, 750 KOHM 5% .25 WATT CF	102	2	U48,U54	E-01008-0020	IC SOCKET, 20 PIN DIP
46	1	R61	E-00105-0230	RES, 1 KOHM 5% .25 WATT CF	103	2	U55,U66	E-01008-0024	IC SOCKET, 24 PIN DIP
47	3	R16,R19,R29	E-00105-0284	RES, 470 KOHM 5% .25 WATT CF	104	8	U3,U4,U12,U15,U18,U20	E-01008-0028	IC SOCKET, 28 PIN DIP
48	1	VR1	E-00589-0044	POT, 1 KOHM, PHEN (PT100M2.5)K48	105	1	U67,U68		
49	1	R49	E-00105-0533	RES, 4.7 KOHM 5% .25 WATT CF	106	1	U34	E-01008-0040	IC SOCKET, 40 PIN DIP
50	1	R53	E-00105-0290	RES, 27 KOHM 5% .25 WATT CF	107	1	U71	E-01008-0064	IC SOCKET, 64 PIN DIP
51	3	R34,R36,R48	E-00105-0237	RES, 2K OHM 5% .25 WATT CF	108	2	TP4,TP8	P-09018-0001	REVS BARE PCB, 5-5500 MPU BOARD
52	1	U43	E-00620-0429	IC, 74HC05, OC HEX INV, 14 PIN STD	109	1	LED1	NOT USED	
53	1	U57	E-00620-0614	IC, TI JTL7702A PWR SUPRVSR, 8 PIN STD	110	11	JW2,JW4-JW5,JW6-14	E-03679-0002	LED, RED HUMP-3000
54	3	U5,U9,U11	E-00620-0401	IC, M4D1108P OCTAL DIODE, 16 PIN STD	111	1	U19	E-03882	JUMPER SHUNT
					112	1	LBL1	RPK-II-202-0021	R ARRAY/SOL,12PIN,DIP,.25,0220
								LBL-001100-001A LABEL, SILICON SOFTWARE RESTRICTED RM	

PAGE 5 OF

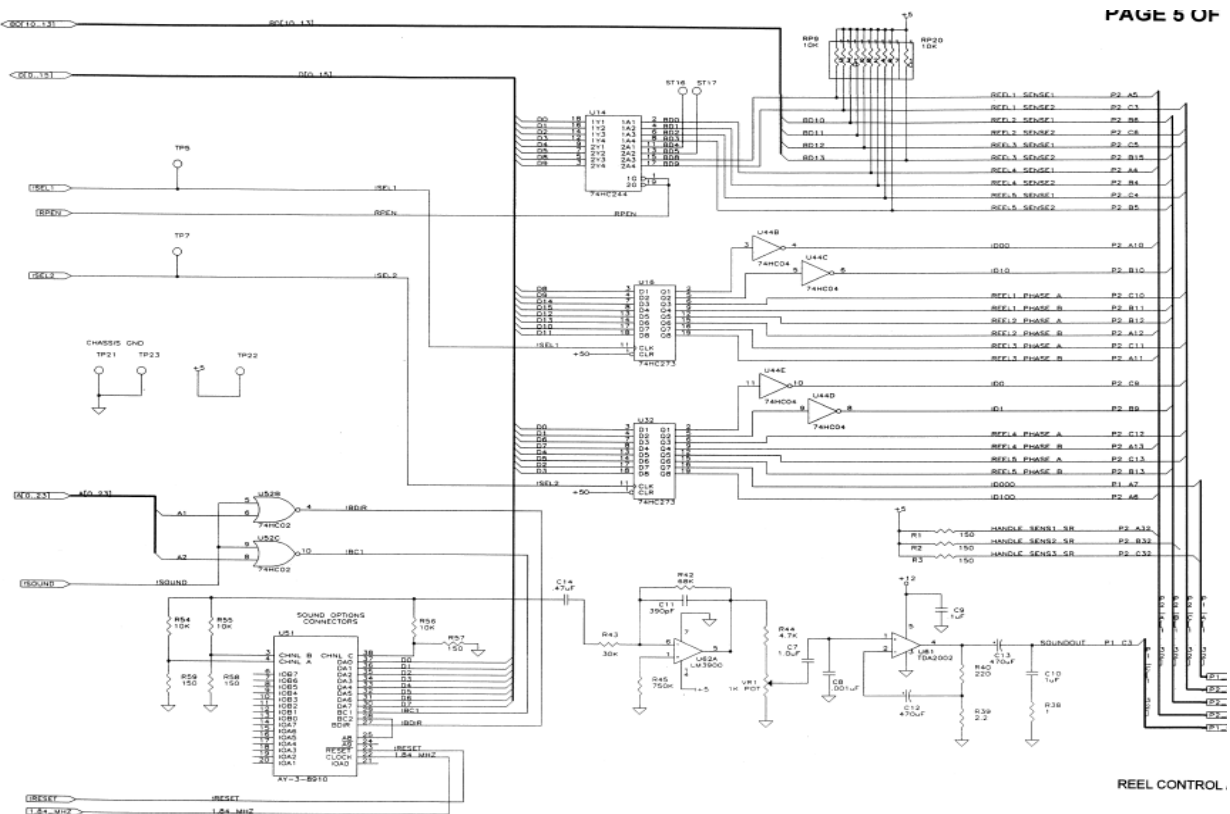

COMPONENT SIDE
TALK SCREEN
L WPU REV D



WPL DRIVER

NOTE

70

570

P, TI

EP-01055-0001

STD
IN DIP

- EP-1055-4
- EP-1055-2

PIN

EP-1055-3
600

```
| SAVB
101 NH SAVB
```

DITS

11

201-201
201-201
201-201
201-201
201-201

/ SOUND