

ARISTOCRAT USA MK6 PLATFORM - SET UP TUTORIAL.

This PDF is a step by step setup for "Deep Freeze" USA.


Using Setchip Version 06.03.04

Using System Chip Version 01.04.11

Put the 2 chip extender board on the MK6 XP Mainboard with the set chips installed.




Select what game type by using the players buttons. We are going to set up "Deep Freeze". That is a **Multi-Line Game** like shown in the attachment below.

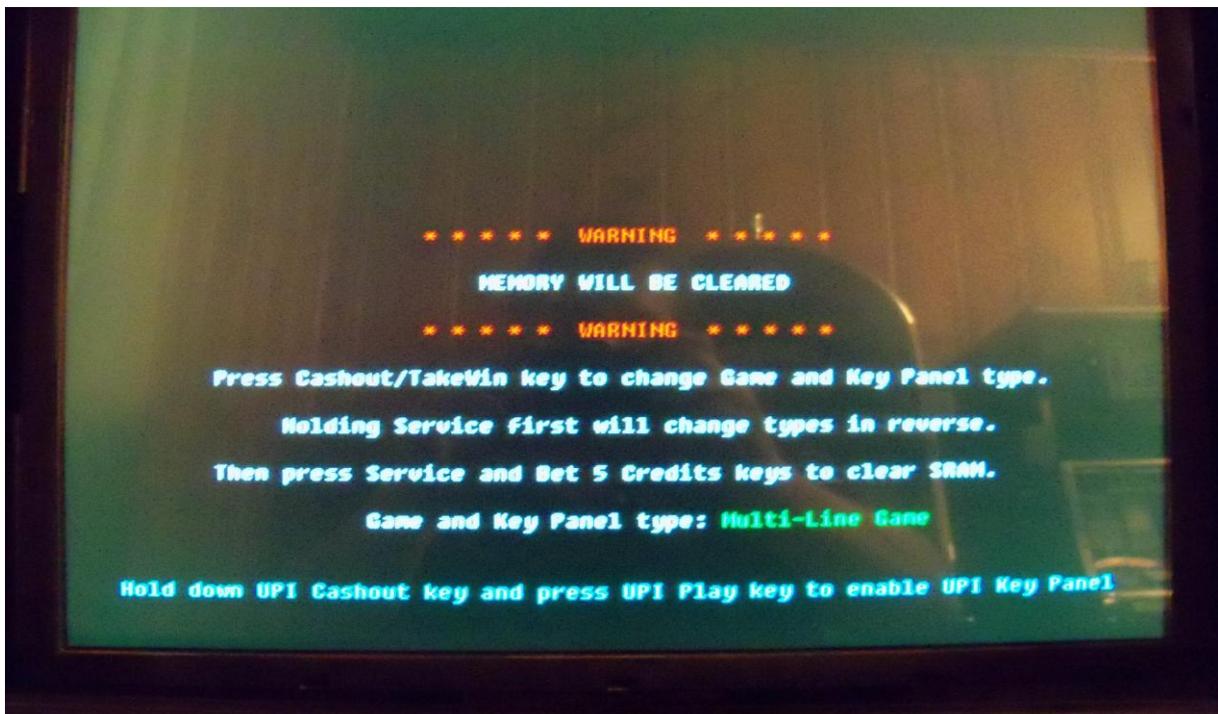

Push the 2 buttons until you get this screen below.


NOTE:- Be careful not to change the "Multi-Line Game" setting.

Once you are in the set up, it's a "25 lines game, 20 bet per line max , Game Variation 3".

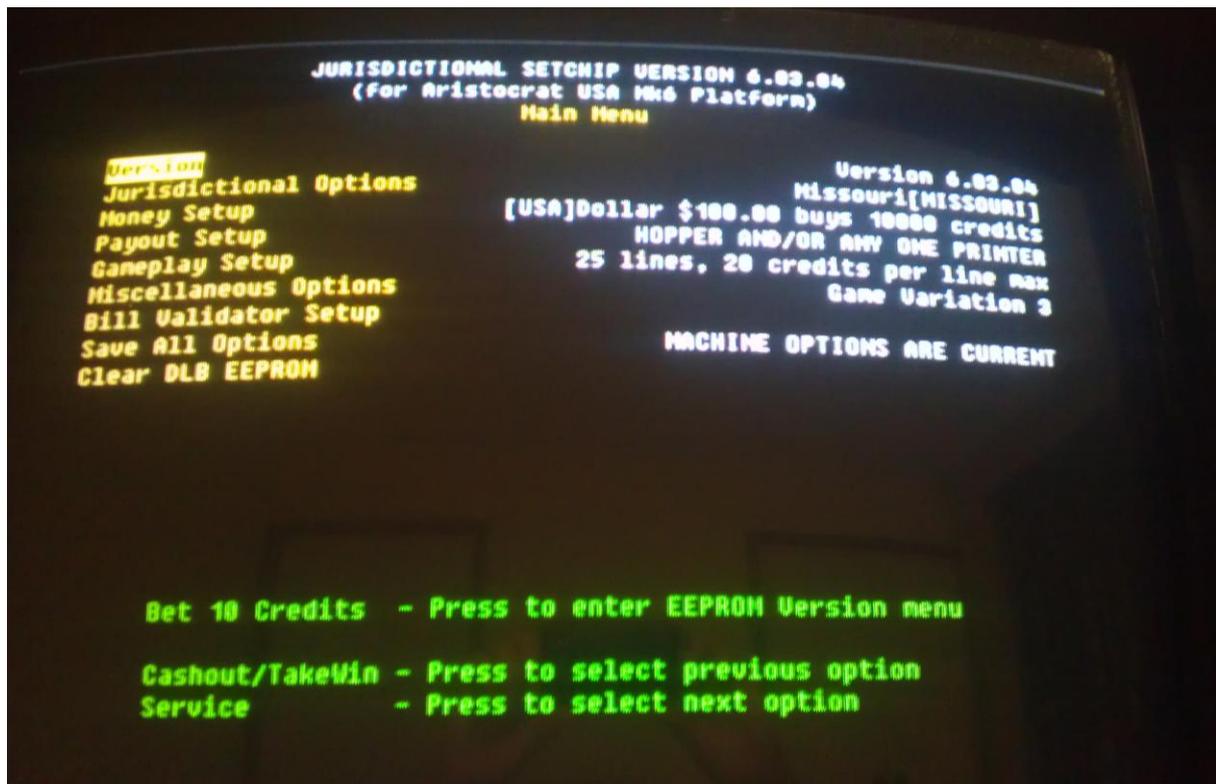


Go into **Money Setup** as below and setup the same settings.

In **Value of one Coin:** , For 1 coin = \$100.00 (much easier than 1 coin = 1 credit !)

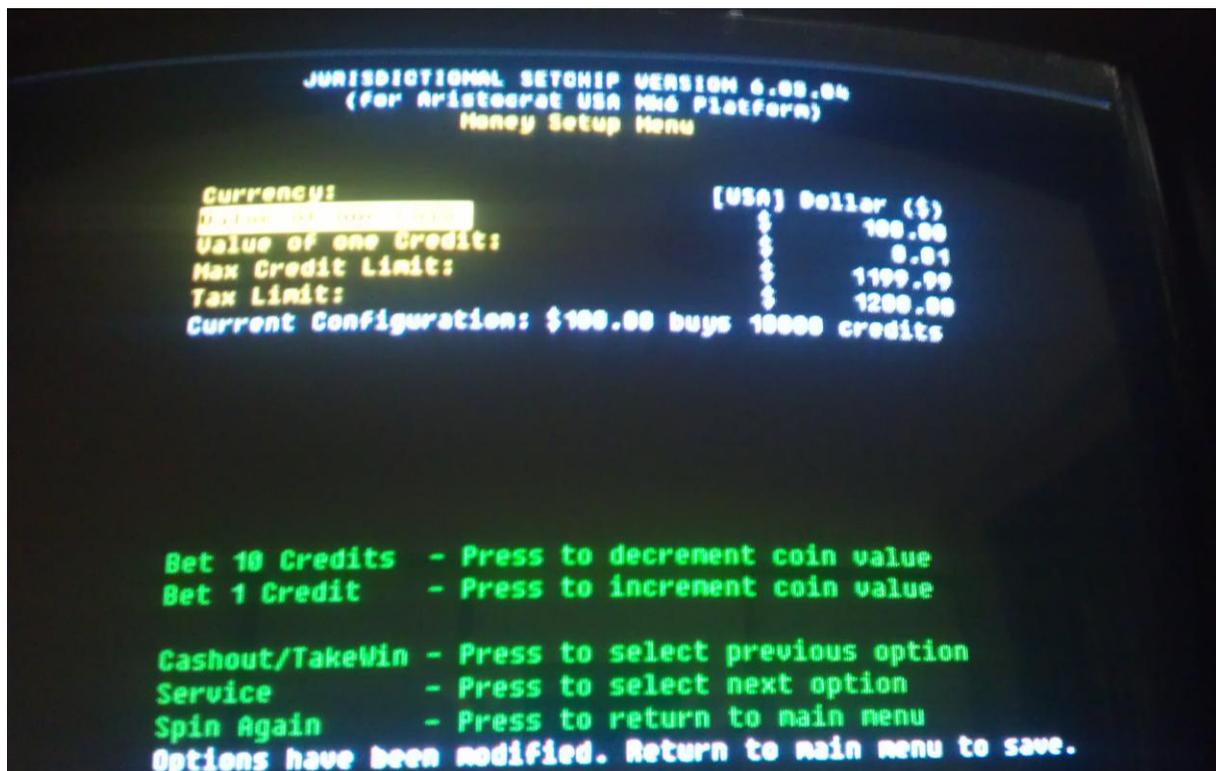


Once your screen looks exactly like mine below (be sure the version is 06.03.04) ,Scroll to "Save All Options" and select. After it's saved, power down the machine and remove the set chip extender board.

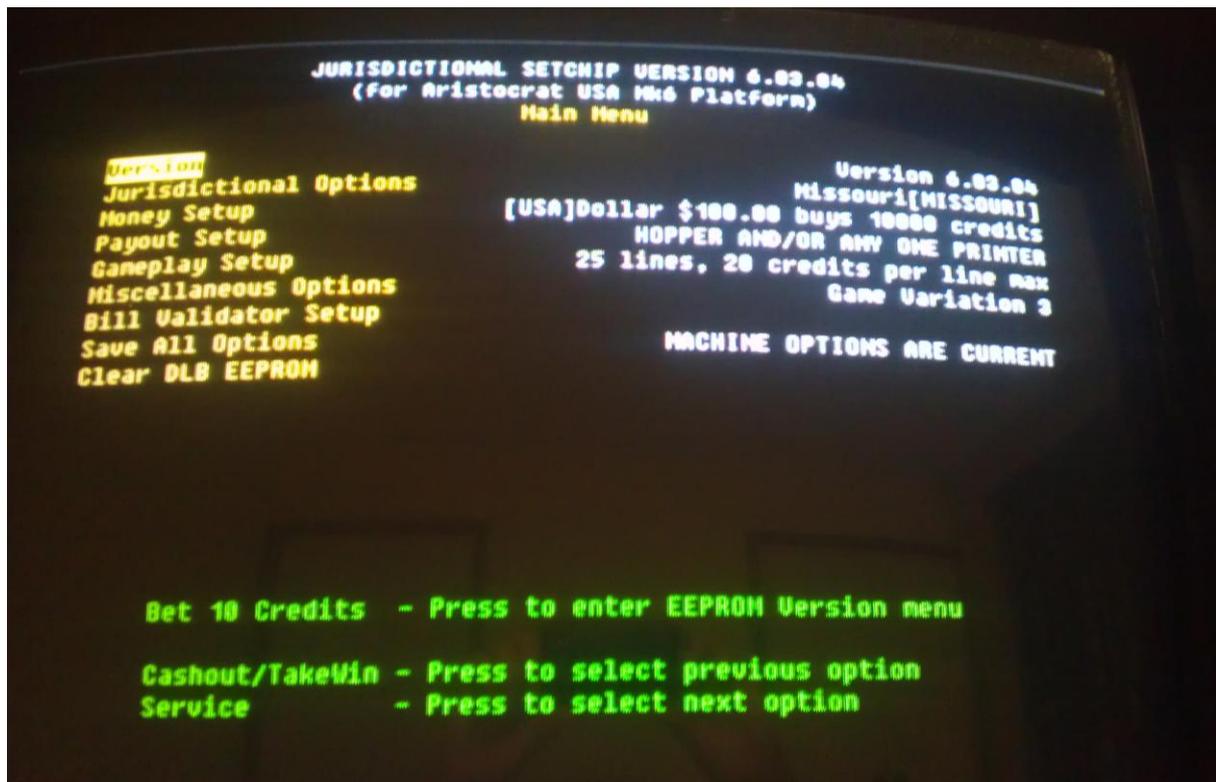


When machine powers up , you should get a game screen like this below.




Turn "audit" key and your screen should look like this below. If it says "can't clear static ram" either the wrong game type is chosen or a bad set or system chips.

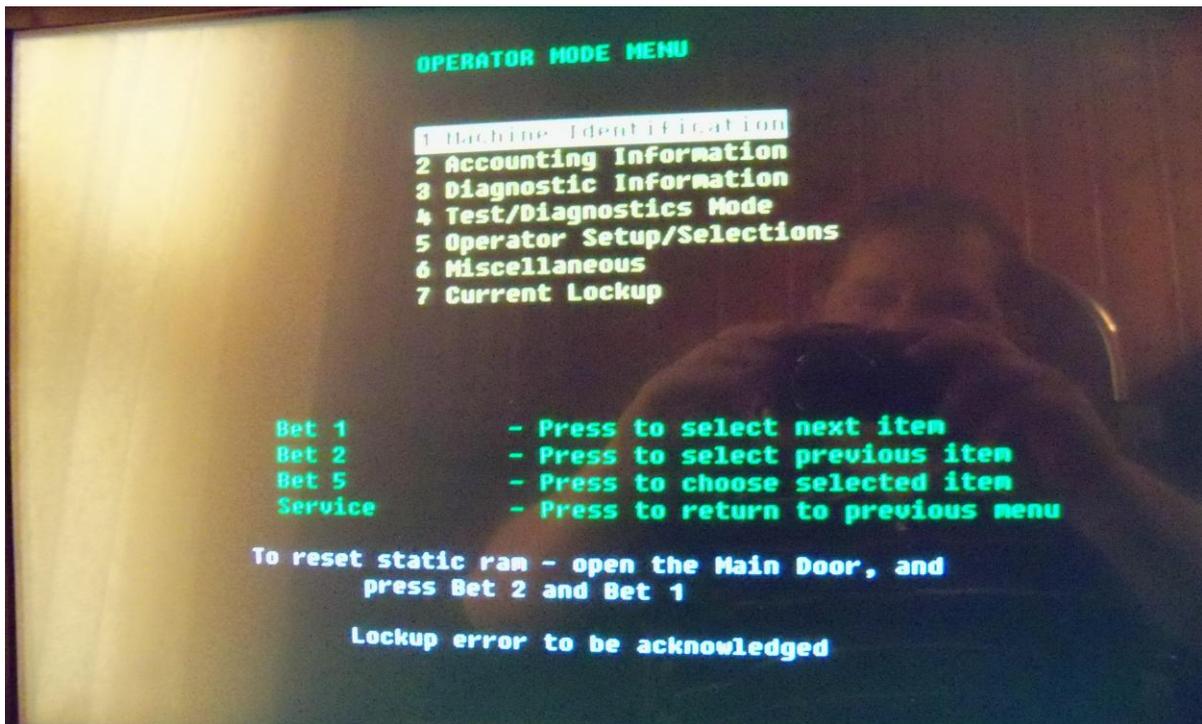


If you are able to clear the ram your screen should look like this below. Scroll and choose "Operator Setup/Selections".

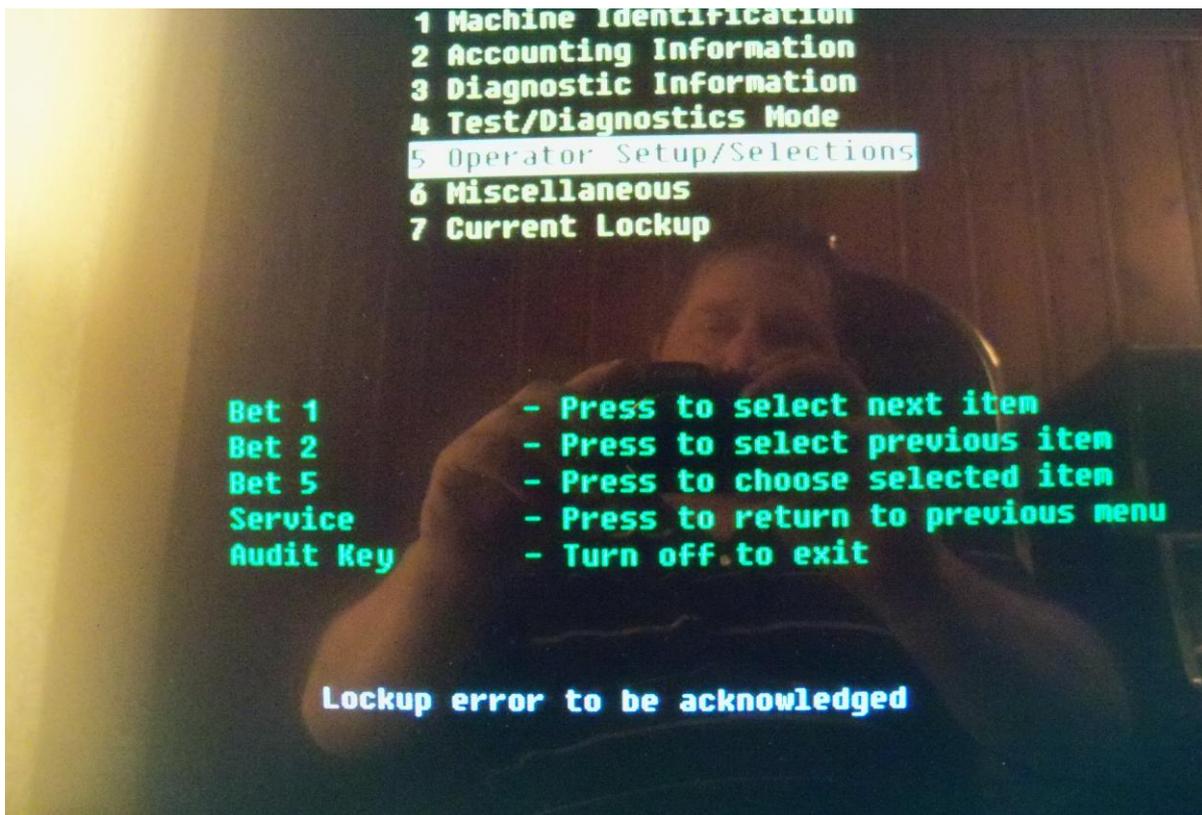

Select "Game Machine Options" below.

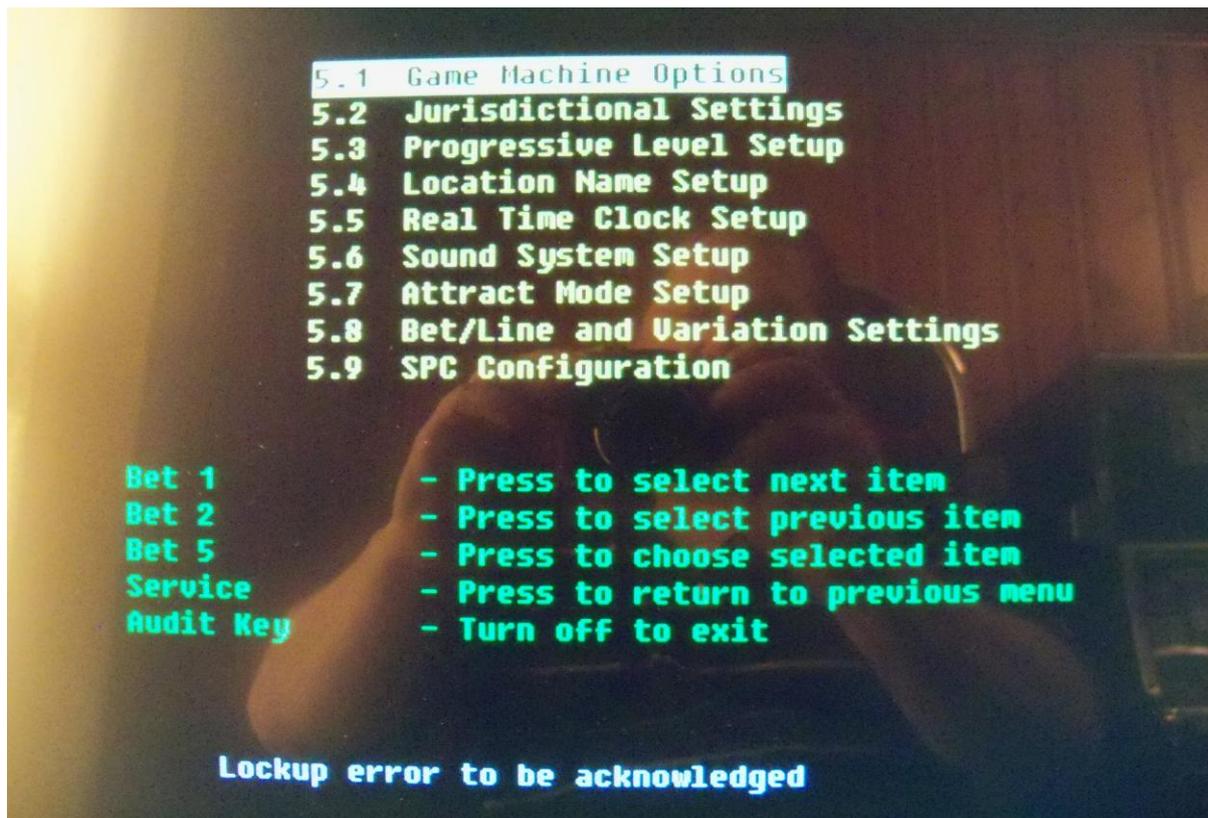


Screen should look like this below.

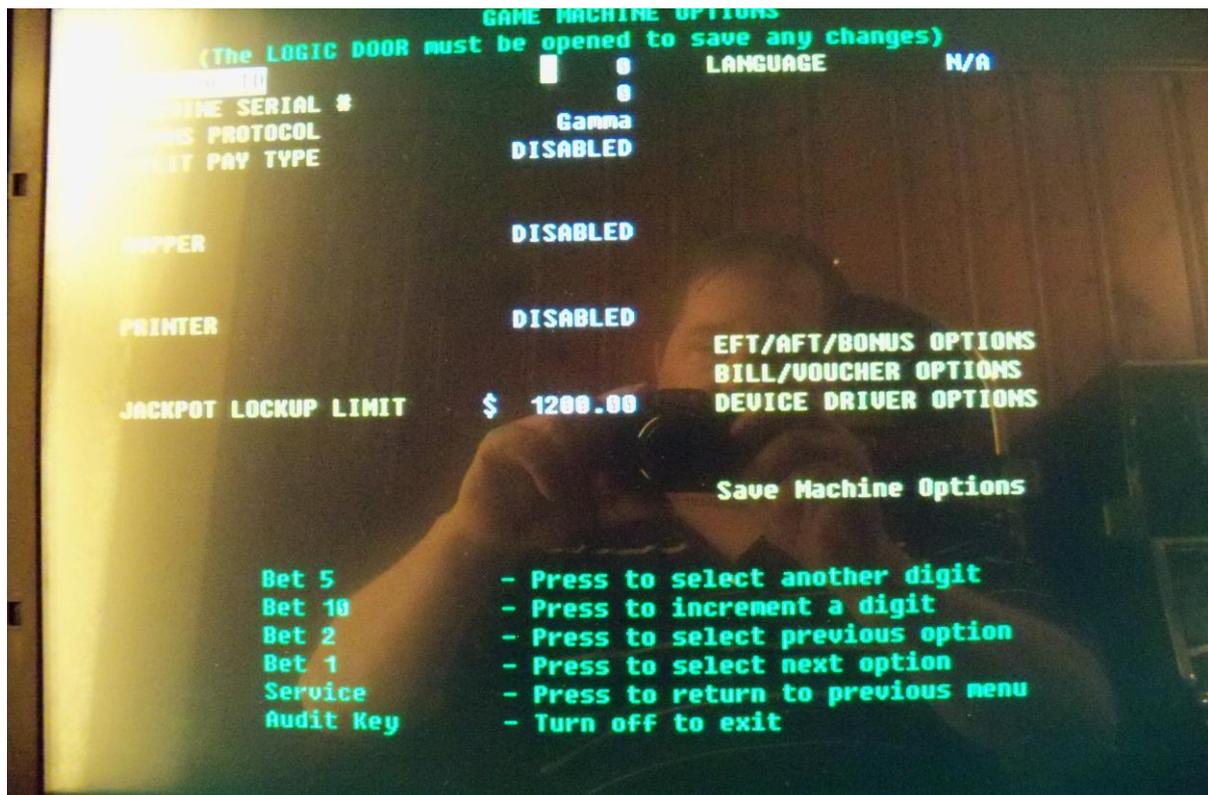


Choose “**BILL/VOUCHER OPTIONS**” ,your screen should look like this below. Be sure to set **MAX BACC LIMIT** to higher than \$100.00




Next, select “**DEVICE DRIVER OPTIONS**” below.

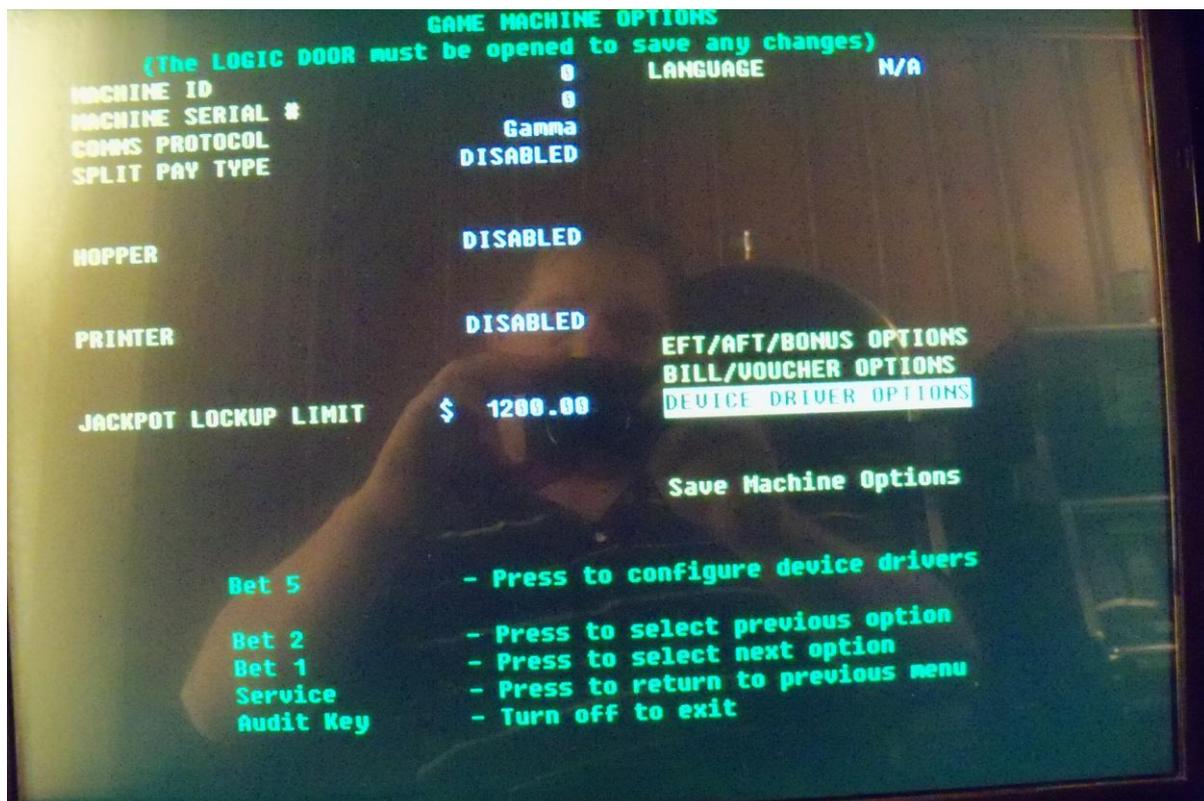

Select your machine devices. I use only the **COIN ENTRY** and **TOUCHSCREEN** in mine.
 NOTE:- Australian Note acceptors will accept \$5 , \$10 , \$20 and \$50 notes.
 Below is a screenshot of the Australian Device Driver Options, USA options may differ.

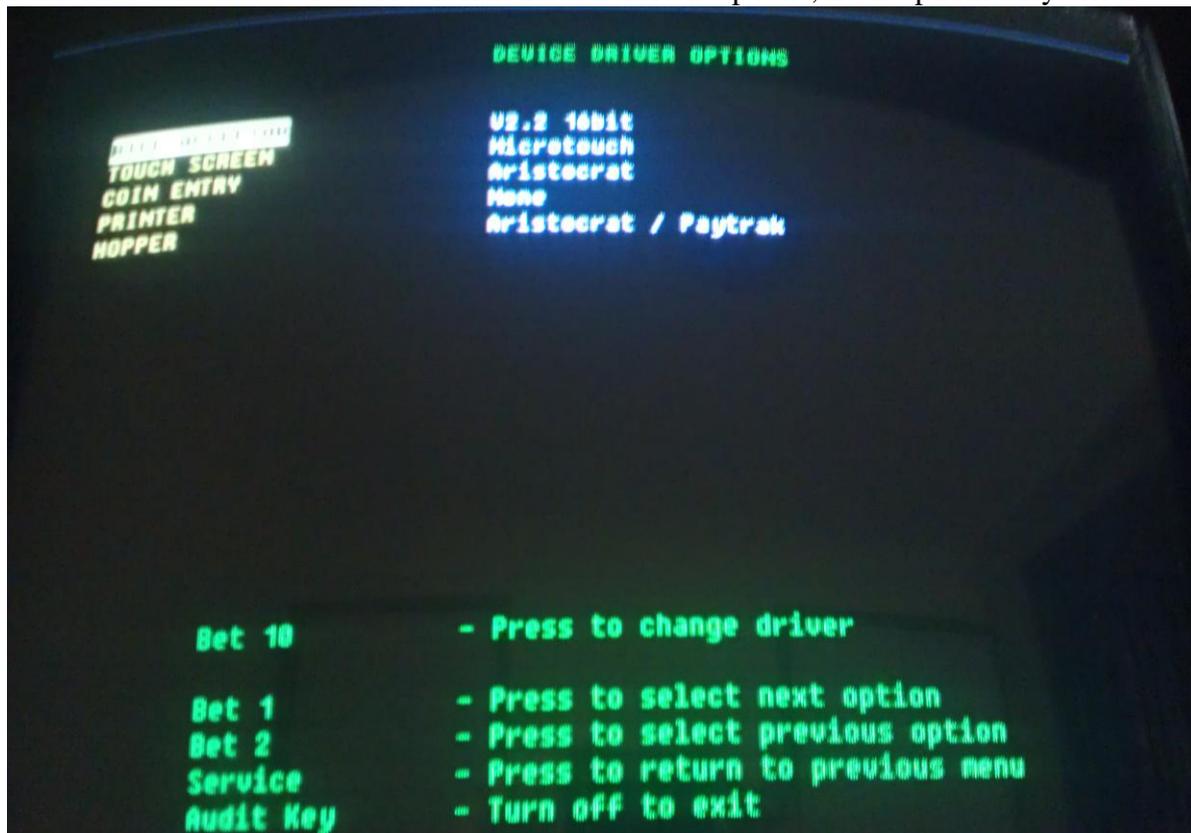


Save Machine Options below.

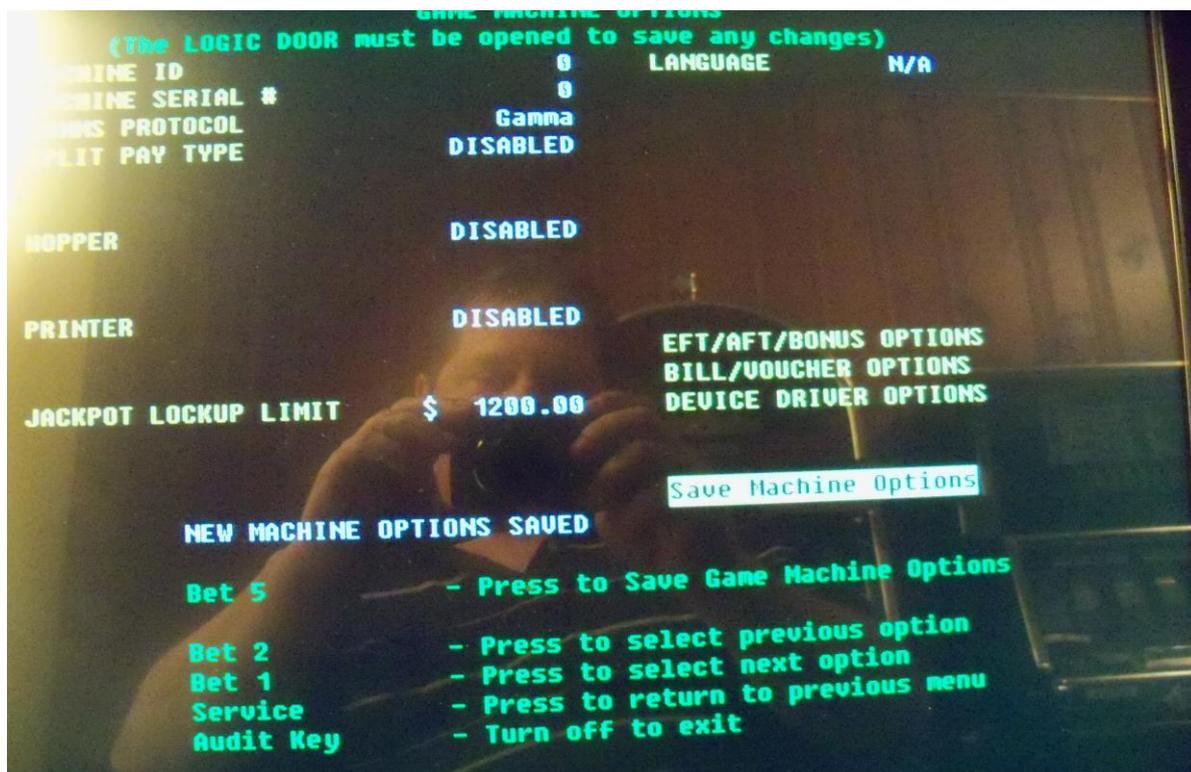

Close logic and main door , TURN AUDIT KEY and should look like this below.
Enjoy!!



Below is the 14 button panel for MK6 USA with different Play Line values (Depending on game setup).
NOTE:- For Australian 14 Button MK6 panel , refer to below button setup when playing USA games.

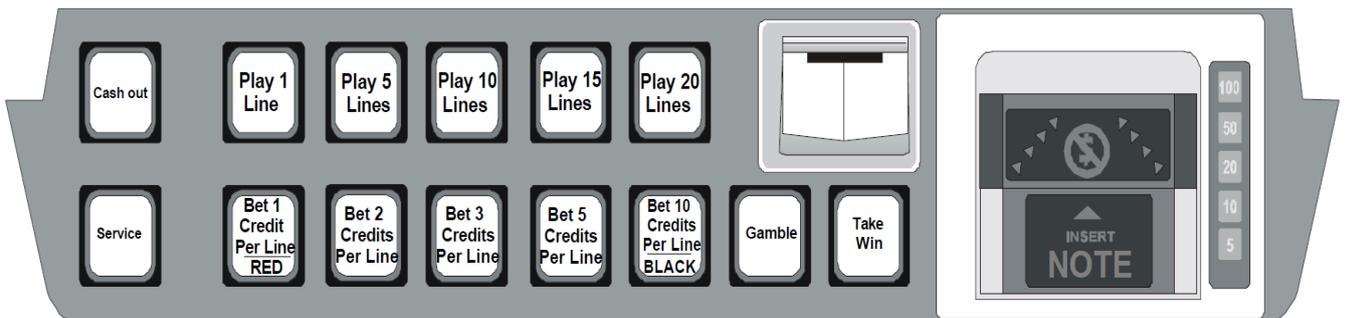

This PDF has been written for educational purposes only.