


ProSlot-6000™ / Mikohn® Standalone Progressive

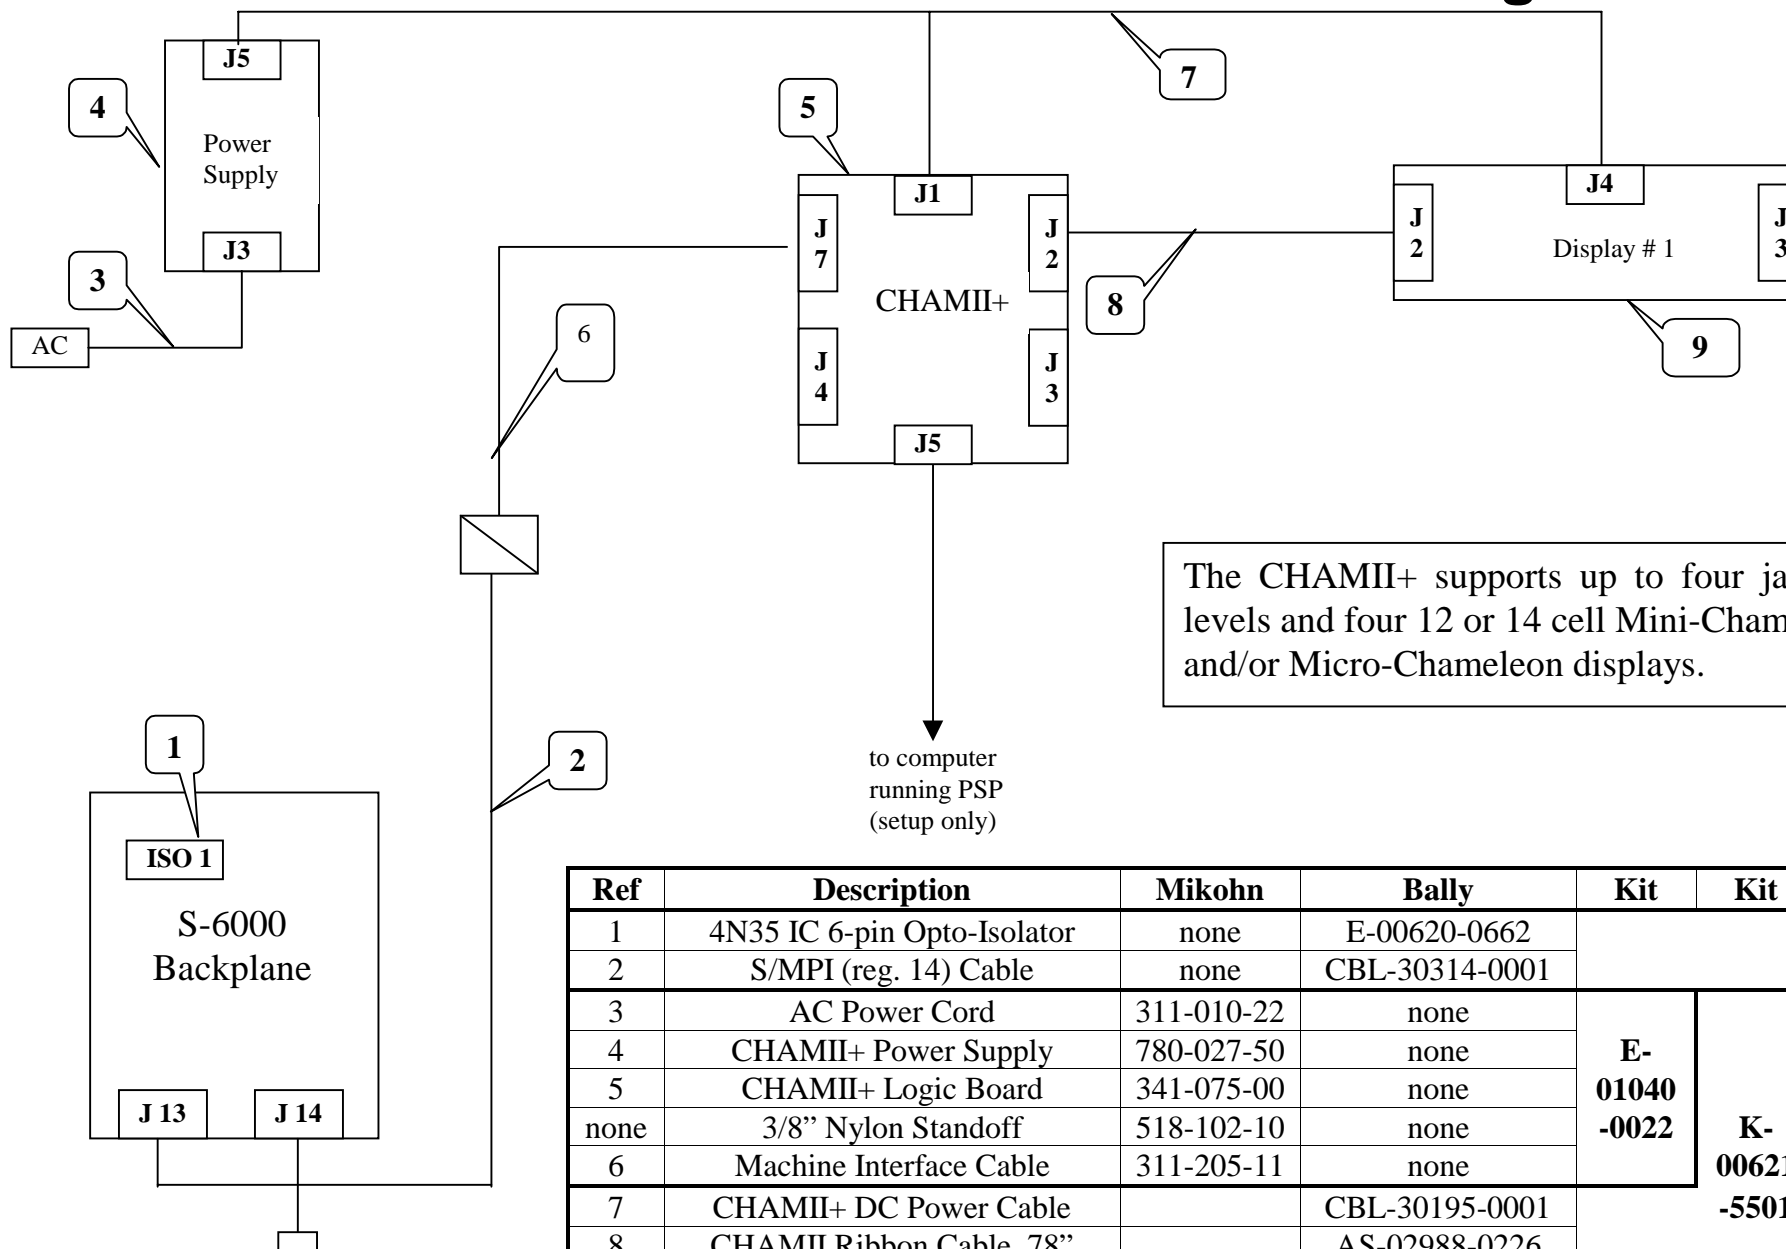

The CHAMII+ supports up to four jackpot levels and four 12 or 14 cell Mini-Chameleon and/or Micro-Chameleon displays.

Ref	Description	Mikohn	Bally	Kit	Kit	Kit
1	4N35 IC 6-pin Opto-Isolator	none	E-00620-0662	E-01040-0022	K-00621-5501	K-00721-5525
2	S/MPI (reg. 14) Cable	none	CBL-30314-0001			
3	AC Power Cord	311-010-22	none			
4	CHAMII+ Power Supply	780-027-50	none			
5	CHAMII+ Logic Board	341-075-00	none			
none	3/8" Nylon Standoff	518-102-10	none			
6	Machine Interface Cable	311-205-11	none			
7	CHAMII+ DC Power Cable		CBL-30195-0001			
8	CHAMII Ribbon Cable, 78"		AS-02988-0226			
9	12-cell Mini-Chameleon Display	341-010-10 341-010-30	AS-03110-0025			
none	12-cell Mini Mounting Kit		M-01760-0001			

ProSlot-6000™ / Mikohn® Standalone Progressive

CHAMII+ Settings	
MENU = SYST	
ALL	OFF
MENU = ADDR	
GRADDR	255
IDADR	64
RTR ADDR	OFF
MACH ADDR	Machine ID (1~32)
MENU = DISP	
JP LIMIT	NO
# DISPLAYS	1
JP GRP1	SA
MFILE1	4
ODSPEED1	50
FONT1	ODMTR8
SIZE1	60
The controller will support up to four displays and jackpots.	

CHAMII+ (PSP) Settings	
F 3	SNGL
F 4	M-08
F 5	3 SEC
F 6	JP0
F 7	\$\$\$\$
F 8	MS00

S-6000 MPU Jumper Settings	
JW8	2-3
JW9	2-3
U24	removed

S-6000 Progressive Options	
02	0004
07	0002
78L	0001

For additional information regarding progressive setup and operation, please refer to Module 7 of the ProSlot-6000™ Modular Manual.