


**Wide Body Cabinet (WBC) - Square Top**  
February 15, 2006



## Wide Body Cabinet (WBC) - Square Top February 15, 2006

### DIMENSIONS:

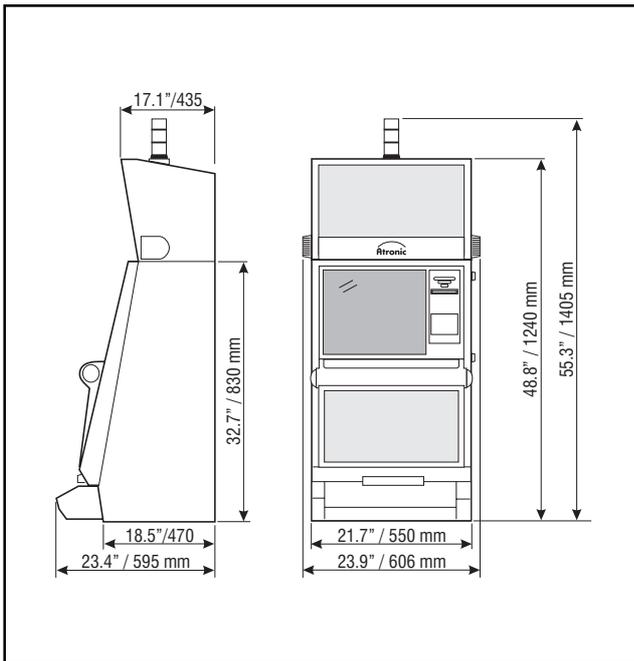


### WBC - Square Top with 3 stage Candle

Weight: approx. 220 lbs / 100 Kg

Height: 55.3" / 1405 mm

Width: 23.9" / 606 mm

Depth: 23.4" / 595 mm

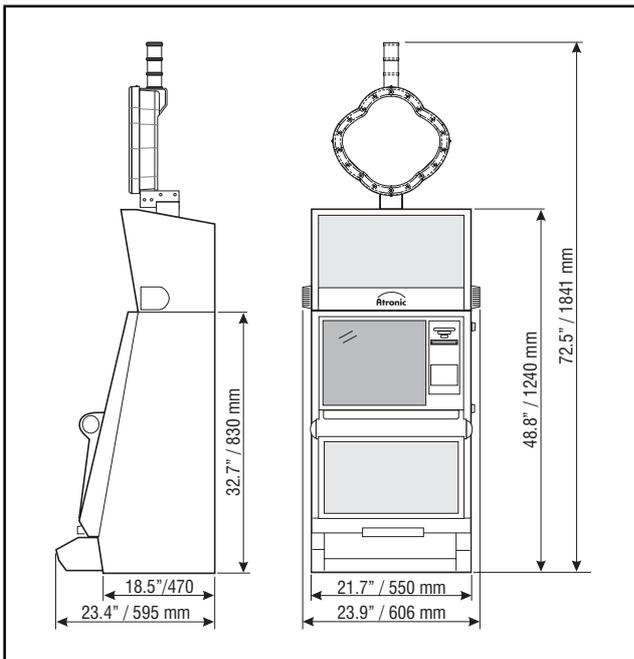

### WBC - Square Top with Topper

Weight: approx. 228 lbs / 104 Kg

Height: 72.5" / 1841 mm

Width: 23.9" / 606 mm

Depth: 23.4" / 595 mm

## Wide Body Cabinet (WBC) - Square Top February 15, 2006

### TECHNICAL DATA: Electrical Specifications

Required Voltage	220V - 240V, 2.0A, 50Hz 100V - 120V, 4.0A, 60Hz
Power Consumption	Idle Mode: approx. 185W 1.60A / 115V, 0.8A / 230V  Payout Mode: approx 200W 1.75 / 115V, 0.9A / 230V
Power Supply	Secondary Voltage: +24V / 4A +12V / 4A -12V / 0.3A +5V / 10A
Fuses	Power Supply: F 5A / 250V Monitor: T 3A / 250V Power Board: T 2A / 250V  Backplane F1: +5V T 5A / 250V Backplane F2: +12V T 5A / 250V Backplane F3: -12V T 0.315A / 250V Backplane F4: +24V T 3.15A / 250V
Lamps	Fluorescent Lamps: 15W, 17" / 438 mm Button Lamps, small: 14V / 1W Button Lamps, large: 14V / 2W

### Environmental Specifications

Operating Temperature:	32°F / 0°C - 113°F / 45°C
Operating Humidity:	0% - 85%
Combustible Weight:	< 20 lbs. / 9 Kg

## Wide Body Cabinet (WBC) - Square Top February 15, 2006

**DRILLING  
TEMPLATE:**

